


ShadowRib™

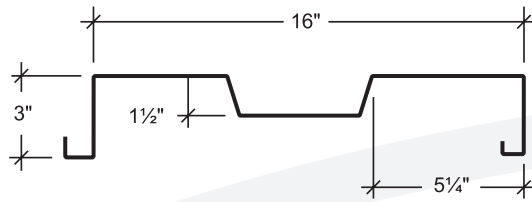

DESCRIPTION:

The ShadowRib™ panel combines aesthetics, economics, and function to bring definition to metal structures. ShadowRib™ is a proven performer and a versatile tool to the designer.

GAUGE: 24 and 22 (minimum quantity may be required for 22 gauge)

LENGTH: Maximum recommended 40'

DIMENSIONS: 16" wide by 3" high

FASTENERS: Concealed fastening system. Panels may be secured to the structure from outside the building with the ShadowRib™ concealed clip or from inside the building with an expansion fastener. Both are positive fastening methods that create a secure interlock between panel and structure.

FINISH: Galvalume® and Architectural Series

USAGE: The ShadowRib™ panel can be used for walls, fascias, and equipment screens. Apply the panel over light gauge framing, purlins, girts, structural steel, and joists. In many instances, the panel can span from floor to ceiling without interior support, making it ready to apply a variety of insulation methods into the 3" cavity.

NOTE: Oil-canning is not considered grounds for rejection of any panel system. Oil-canning can occur in any panel with wide flat sections. Heavier gauge, embossing, striations, flatter sub-frame systems and support from a solid sub-deck can all help to minimize oil-canning.