



Value **Express** *Plus*™



REAL PEOPLE. REAL PRODUCTS. REAL SOLUTIONS.
www.a-s.com

Configure and price your structure in minutes, online, using our web-based system. It's fast, easy and incredibly economical.

If you need a low-complexity building quickly, look no further than ValueExpressPlus. Our advanced web-based system greatly simplifies the ordering process, allowing you to generate a metal building quote based on your specifications in a matter of minutes.

ValueExpressPlus significantly reduces the amount of time it takes to detail and design projects by automating core functions. Time-consuming tasks, such as *charting area building codes, detailing eave and rake conditions, and determining which materials to include for a particular roof slope are all instantly performed by the system.

Best of all, ValueExpressPlus offers an impressive variety of options and accessories when it comes to the design of your metal building. Users can choose from a wide array of features, including:

- Numerous bay spacing options
- Factory located framed openings in varying sizes, including trim
- Up to 5-foot canopies and 5-foot purlin extensions
- PBR/Vistashadow panel profiles and interior liner panels
- Roof slopes in increments including 1:12, 2:12, 3:12, and 4:12

Once you have logged in at www.a-s.com, ValueExpressPlus prompts you to answer several simple questions about your metal building.

Through each stage of the ordering process, a graphical rendering appears illustrating which components you have specified. As selections are made, a red line appears on the building schematic, clarifying your preferences visually so you can feel confident about your decisions.

Step One:

Choose your endwall width and frame type.

Step Two:

Choose your sidewall length and girt condition.

Step Three:

Choose your eave height.






Step Four:

Choose your bays

Step Five:

Choose your roof pitch.

...and you're done.

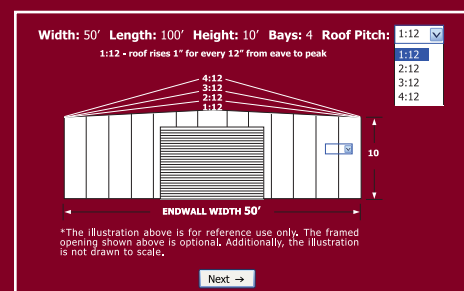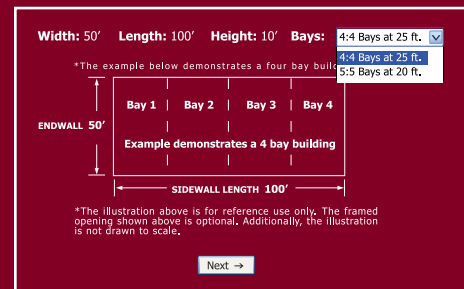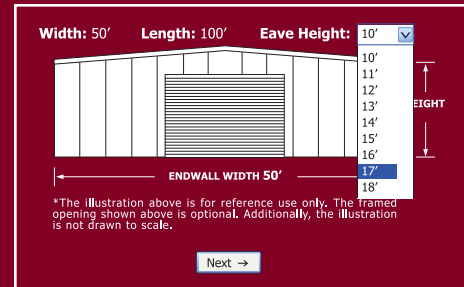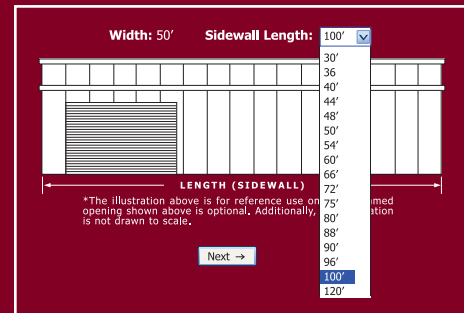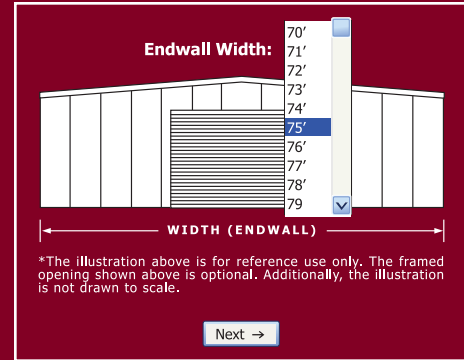

Building Specifications

- Width: 30' to 100' feet in 1' increments
- Length: 30' to 200' in 4', 5' or 6' increments
- Eave Height: 10' to 20' in 1' increments
- Bays: Equal bays required, but several combinations
- available on longer buildings
- Roof Slope: 1:12, 2:12, 3:12, 4:12
- Girt Condition: Bypass or Flush
- Frame Type: Non-Expandable Bearing Frame Half-Load
- Non-Expandable Rigid Frame Full-Load Expandable Frame
- Shape: Tapered or Straight Column
- Roof Panel: PBR
- Wall Panel: PBR or Vistashadow

Exceptional Signature® 200 Color Options:

Hawaiian Blue		Saddle Tan	
Crimson Red		Desert Tan	
Fern Green		Polar White	
Burnished Slate		Rustic Red	
Koko Brown		Light Stone	
Charcoal Gray		Gallery Blue	

Ash Gray

Accessories

- Purlin and Canopy Roof Extensions
- Windows
- Gutters and Downspouts
- Vents
- Framed Opening Jamb Flashing
- Light Transmitting Panel
- Interior Wall Liner Panel
- Roof Jacks
- Walkdoors
- Base Trim Options





A&S Building Systems
1880 Hwy. 116
P.O. Box 53
Caryville, TN 37714

P: 800.274.2100 or 865.426.2141
F: 865.426.2011
sales-marketing@a-s.com

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, A&S reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at www.a-s.com. Application details are for illustration purposes only and may not be appropriate for all environmental conditions, building designs or panel profiles. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. If there is a conflict between this manual and project erection drawings, the erection drawings will take precedence.