


IPS IBL

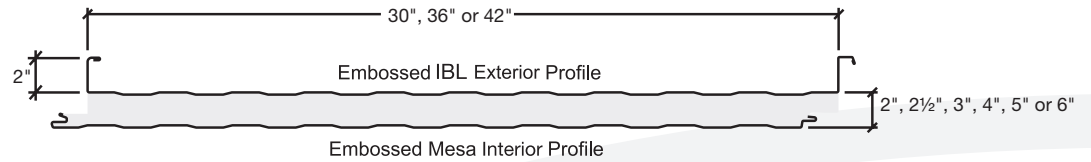

DESCRIPTION:

The exterior profile of the IBL roof panel has a 2"-high standing seam with the Mesa profile. The interior profile is also a Mesa pattern. The IBL panel is attached to structures with concealed clips to ensure maximum R-values.

FEATURES:

- The IBL Panel utilizes concealed clips and eliminates thermal short circuits.
- The standard exterior surface is 24-ga. and 22-ga. Galvalume® coated steel with silicone polyester or Kynar 500®/Hylar 5000® coatings.
- IMPs allow for fast assembly times and easy installation, resulting in reduced construction labor costs and earlier business starts.

GAUGES

- Exterior: 24 and 22
- Interior: 26, 24 and 22

SURFACES

- Exterior: Stucco-embossed
- Interior: Stucco-embossed

WIDTHS

- 30", 36" and 42"

THICKNESSES

- 2" 2 ½" 3" 4" 5" 6"

R-VALUE

- 15.3 19.2 23 30.8 38.5 46.1

LENGTHS

- Recommended maximum is 50'

ATTACHMENT

- Concealed clips