


# IPS RWP II

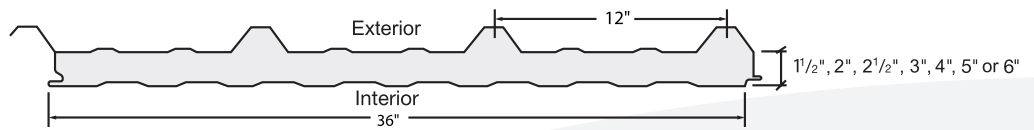

## DESCRIPTION:

The versatility of the RWP II panel offers a multitude of design options. It can be utilized for roof or wall applications. The standard exterior skin is smooth but can be embossed if requested. The interior skin is roll-formed with our standard interior Mesa profile.

## FEATURES:

- The RWP II panel utilizes a through-fastened attachment.
- The standard exterior surface is Galvalume® coated steel with silicone polyester or Kynar 500/Hylar 5000 coatings.
- IMPs allow for fast assembly times and easy installation, resulting in reduced construction labor costs and earlier business starts.

## GAUGES

- Exterior: 26, 24 and 22
- Interior: 26, 24 and 22

## SURFACES

- Exterior: Smooth or embossed
- Interior: Stucco-embossed

## WIDTHS

- 36"

## THICKNESSES

- 1 1/2" 2" 2 1/2" 3" 4" 5" 6"

## R-VALUE

- 11.5 15.3 19.2 23 30.8 38.5 46.1

## LENGTHS

- Recommended maximum is 40'

## ATTACHMENT

- Through-fastened