


IPS EWP II

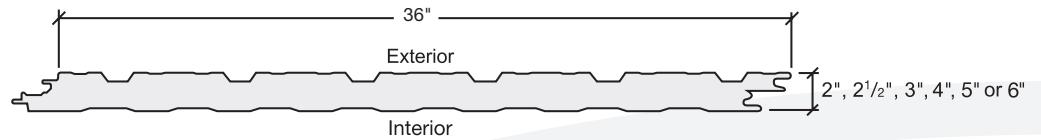

DESCRIPTION:

The traditional styling and distinct vertical lines of the EWP II is ideal for custom-designed or conventional building construction, especially commercial and industrial applications. The interior skin employs a Mesa profile.

This panel can also be utilized in Cold Storage facilities. The recommended thickness is four inches or more and width is 36 inches wide. Both the interior and exterior skins of the panel are 26-gauge. The interior panel is coated with straight polyester USDA White.

FEATURES:

- The EWP II Panel utilizes concealed clips and eliminates thermal short circuits.
- The standard exterior surface is Galvalume® coated steel with silicone polyester or Kynar 500/Hylar 5000 coatings.
- IMPs allow for fast assembly times and easy installation, resulting in reduced construction labor costs and earlier business starts.

GAUGES

- Exterior: 26, 24 and 22
- Interior: 26, 24 and 22

SURFACES

- Exterior: Stucco-embossed
- Interior: Stucco-embossed

WIDTHS

- 36"

THICKNESSES

- 2" 2 1/2" 3" 4" 5" 6"

R-VALUE

- 15.3 19.2 23 30.8 38.5 46.1

LENGTHS

- Recommended maximum is 40'

ATTACHMENT

- Concealed clips